

AQUEAS AQ-SP02 STARTING PLATFORM









The AQUEAS AQ-SP02 Starting Platform has a low profile designed for a wide coping (end wall) where the coping is between 190 mm but no higher than 440 mm from the water level.

The starting platform is made of heavy duty 316 mirror polished stainless steel 38 mm^o with a 500 mm x 500 mm non-slip pattern blue fibreglass top. It also features a backstroke bar at the front.

Fixing options:

- (A) Fixed Fixed using 100 mm dia. leg flanges
- (B) Removable with standard legs 2 x AQ-PS01 sockets on the front legs and cap ends on the rear legs
- (C) Removable with articulated rear legs $2\,\mathrm{x}$ AQ-PS01 sockets on the front legs and articulated feet on the rear legs

The (C) Removable is a popular choice as the articulated feet compensate for an uneven surfaces. Removable (B) & (C) blocks can be stored away when not required.

Articulated feet and sockets can be place at the front or rear based on your needs. Specify when ordering.

Platforms are supplied with blue tops as standard but can be ordered with white tops by request.

Platforms are supplied without lane numbers, if lane numbers are required this is an option and must be requested at time of placing an order.

Brand: AQUEAS

Frame: Heavy Duty Stainless Steel 38 mm°

Top: Fibreglass 500 mm x 500 mm

Finish: Mirror Polished

Height from coping: 310 mm













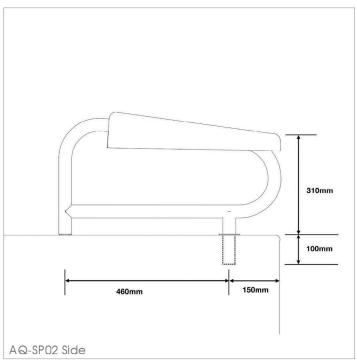

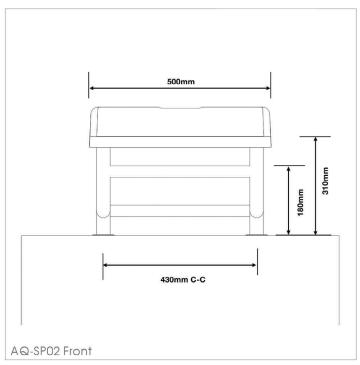

PAQ-SP02-A
AQUEAS Starting Platform Flanged AQ-SP02-A
AQUEAS Starting Platform Socket/Std Leg AQ-SP02-B
PAQ-SP02-C
AQUEAS Starting Platform Socket/Adj Leg AQ-SP02-C

Option:

PAQ-SPN002 AQUEAS Starting Platform Numbers AQ-SPN002 (4 per unit)

